



沈阳东旭电梯有限责任公司
SHENYANG DONGXU ELEVATOR CO., LTD



沈阳东旭电梯有限责任公司
Shenyang Dongxu Elevator Co.,Ltd

地址：中国 沈阳市万山路28号

邮编：110034

电话：(86) 24 86522388 86553777

传真：(86) 24 86537388

网址：www.dongxudianti.com

邮箱：dongxudianti@126.com

Address: 28#, Wanshan Road, Shenyang, China

Postcode: 110034

TEL: (86) 24 86522388 86553777

FAX: (86) 24 86537388

Http: //www.dongxudianti.com

E-mail: dongxudianti@126.com

关于我们 About us

好的产品源于它优质的服务。在追求卓越品质的同时，我们更注重提供个性化的产品及面向客户的服务。全球化的理念使我们走在了技术创新的前沿。提供客户需要的产品将是我们不断的追求。

The good products originate from the high quality service. To pursue the excellent quality and in the meantime, we still pay more attention to supply the personalized product and service to client. The globalization idea lets us marching at the forefront of the technological innovation.

Supply the product to clients according to them requirement is our aim forever.

全球化概念设计

设计上参照了国标GB 25194-2010及AS1735.4、BS5655-1989等国外杂物电梯标准。

公司从2004年至今相继推出了众多系列新型杂物电梯产品：

The globalization idea design

The design refers to the standard GB 25194-2010, AS1735.4 and BS5655-1989 and other overseas dumbwaiter standard, etc.

Our company has released one after another series new products from 2004 until now:

国内首家新型杂物电梯框架 (The first new-style frame of dumbwaiter in China)

国内首家电磁门刀 (The first magnetic cam in China)

国内首家机电联动门锁 (The first electro-mechanical interlock in China)

国内首家自动门锁 (The first automatic lock in China)

国内首家自动门刀 (The first automatic cam in China)

国内首家单扇外敞落地式杂物电梯 (The first hinged door on floor level in China)

国内首家双扇上滑落地式杂物电梯 (The first 2 panels up sliding door on floor level in China)

国内首家独特对角导轨布置转角门杂物电梯 (The first distinctive design which guide rails are placed on both sides of car diagonal for 90° adjacent entrance dumbwaiter in China)

国内首家落地式杂物电梯轿厢入口保护-轿厢挡杆 (The first car entrance protection for floor type dumbwaiter in China-car protection bar)

以上产品为专利产品 (Above products are patents)

公司简介(Company introduction)

公司拥有现代化厂房和精良的生产设备。

精心为广大客户打造具有专业水准的系列杂物电梯及家用电梯产品。公司所生产的杂物电梯技术含量高，品质优秀，并具有多项产品专利权。公司销售网络遍及全球，产品已远销哥伦比亚、澳大利亚、美国、埃及、新加坡及巴基斯坦等多个国家。我们始终为客户提供优质的产品和完善的售后服务。

Our company has the modern workshop and excellent production facilities.

Supply the high quality and professional dumbwaiters and home lifts to client. The dumbwaiter has the first-rate technique, excellent quality and several patents. Our sales networks spread all over the world, our products find a good sale in Colombia, Australia, America, Egypt, Singapore and Pakistan and other countries. We always provide the high quality products and perfect services after-sale for client.

公司外景
Company exterior



现代化厂房
Modern factory



完善的服务系统
The perfect service system



我们始终为客户提供优质的产品

和完善的售后服务

We always provide the high quality products
and perfect services after-sale for client


经典产品：垂直中分门（可选配自动门）

适用范围：窗口式杂物电梯（根据客户需要轿厢入口可以设计成90°转角或贯通形式）

Classical product: Vertical bi-parting door on serving height (Automatic door is option)

Applying range: Table type dumbwaiter (According to the requirement of client it can be designed as 90° adjacent entrance or opposite entrance)

DX TW 100-200/A



突出特点

♣ 门系统采用模块化设计，使安装及拆换更为方便

♣ 门挂轮与防出槽装置设计独特，杜绝了门绳脱落的现象

♣ 门钢丝绳全部隐藏在滑道内，防止检修或故障发生时刮碰门绳

♣ 轿门光滑表面朝向轿厢，防止开门过程中刮碰轿内物品

♣ 轿门止动

开、关门过程中止动装置作为门扇拉手，牢固、舒适、方便，关门后具有锁紧上下门扇的功能，使电梯运行更安全

Vertical bi-parting door at serving height

Excellent feature

♣ Door systems adopted modular design, so the installation and change parts are more easier

♣ Door pulley and ward off rope device are distinctive design that prevent the door rope fall off

♣ Door ropes are all hided in the door rails, prevent the door ropes are scraped or bumped when the dumbwaiter is inspected or has emergency

♣ Smooth surface of car door is toward the car inside, ensures the car door can't scrape goods in the cabin during it is opened or closed

♣ Car door stop device

Stop device to play the role of door handle while the door is opened and closed, it is firm, comfortable and convenient. And it can keep upper and lower panel locking after the door has been closed, ensures the dumbwaiter running more safer

此种开门方式的杂物电梯，门扇采用整板一次成型技术，有效的提高了门扇的强度。

在完善手动门技术的基础上，自动门系统厅、轿门具有自动开关功能，并且配置光幕保护，使操作更安全。

The door panel of this type dumbwaiter is made of the whole plate by one-time molding technology to improve the panel strength effectively.

On the basis of perfecting technology of manual door, the landing door and car door of the automatic door system can be opened and closed automatically. And it is equipped with light-beam curtain protection, it lets the operation more safer.

垂直中分门
Vertical bi-parting door

1

完美品质 服务全球

我们始终为客户提供优质的产品

和完善的售后服务

We always provide the high quality products
and perfect services after-sale for client



经典产品：单扇外敞门

适用范围：落地式&窗口式杂物电梯（根据客户需要轿厢入口可以设计成90°转角或贯通形式）

Classical product: Hinged door

Applying range: The dumbwaiter on floor level or serving height (According to the requirement of client it can be designed as 90° adjacent entrance or opposite entrance)

DX TW 100-300/B

单扇外敞落地式

突出特点

- ♣ 门套整体焊接，有效保证门板与门套各边间隙
- ♣ 节省顶层高度和底坑深度
- ♣ 门锁设计独特，无需门刀即可开锁，并且在轿厢离开本层前始终保持开锁状态
- ♣ 轿厢入口保护装置：轿厢挡杆
- ① 采用减速系统，运行轻巧、顺滑，避免撞击检测开关
- ② 防止推车及大型物品溜出轿厢，确保了货物垂直运输的安全

Hinged door on floor level

Excellent feature

- ♣ The structure of door jamb is integrated welding, it can ensure every clearance between door panel and door jamb
- ♣ Save headroom height and pit depth
- ♣ The design of the door lock is distinctive, it doesn't need cam to unlock it, and the lock is always unlocking until the cabin is leaving
- ♣ The protection device for car entrance: Car protection bar
- ① The deceleration device is applied on the protection bar, so the bar is moving smoothly and lightly. And it can avoid bumping the contact switch
- ② It can prevent the handcart and large cargo from dropping out of the cabin, and ensures the cargo safety of vertical transportation

此开门方式更适用于推车式杂物电梯。门系统结构简单、紧凑、可靠，并且可以根据客户现场要求设计左、右开门。门合页的巧妙设计，有效的保证了门系统的安装精度，减少电梯在运行过程中的故障率。

This type of dumbwaiter is more fit for using the handcart. The door system is simple, compact, reliable, and we also can design the left open door or right open door according to the requirement of client. The ingenious design of the door hinge can effectively ensure the installation precision, reduces the failure rate during the dumbwaiter is moving.

2

单扇外敞门
Hinged door



我们始终为客户提供优质的产品

和完善的售后服务

We always provide the high quality products
and perfect services after-sale for client

新品推荐：双扇上滑门（可选配自动门）

适用范围：落地式&窗口式杂物电梯（可配置全封闭轿门）

New product recommended: 2 panels up sliding door (Automatic door is option)

Applying range: Floor type or table type dumbwaiter (It can be equipped with total sealed car door)

DX TW 100-300/H

双扇上滑落地式

突出特点

- ♣ 门滑道不仅使门间隙得到保障，而且使门扇在开关过程中轻便、顺滑
- ♣ 不占用井道外部空间
- ♣ 浅底坑、小顶层，最大限度节省建筑空间
- ♣ 全封闭轿门（与厅门开门方式一致）
- ♣ 门系统组装后整体发货，提高了安装工艺

2 panels up sliding door on floor level

Excellent feature

- ♣ The door guide rail not only ensures the door clearance, but also lets the door panels move lightly and smoothly
- ♣ Doesn't occupy the space outside of the shaft
- ♣ The pit depth and the headroom height is small, save the build space maximumly
- ♣ Total sealed car door (the type is same as landing door)
- ♣ The door system has been assembled and installed as a whole to leave company, improves the installation technics

该门系统采用人性化设计，配置全封闭轿门（与厅门开门方式一致），防止轿内细小物品滑出轿厢，使电梯运行更安全。

在完善手动门技术的基础上，又实现了自动化功能，并配置光幕保护装置，使操作更加安全。


The human oriented design is applied on door system. It is equipped with total sealed car door (the type is same as landing door) to prevent the small goods from dropping out of the cabin. It lets the dumbwaiter running more safer.

On the basis of perfecting technology of manual door, it can be added the automatic function. And it is equipped with light-beam curtain protection, it lets the operation more safer.

双扇上滑门
2 panels up sliding door

3

我们始终为客户提供优质的产品
和完善的售后服务
We always provide the high quality products
and perfect services after-sale for client



DX TW 100-250/D

曳引机下置式

突出特点

- ♣ 满足顶层高度不足的用户需求
- ♣ 便于安装、维护

Machine below

Excellent feature


- ♣ Satisfy the client's requirement which headroom height is not enough
- ♣ Easy to installation and maintenance

4

曳引机下置式
Machine below



我们始终为客户提供优质的产品
和完善的售后服务
We always provide the high quality products
and perfect services after-sale for client



DX TW 100-250/G

90° 转角门

突出特点

- ♣ 可满足客户对于轿厢进出口为90° 或贯通的要求
- ♣ 独特的对角导轨布置，使轿厢和对重运行更加平稳

90° adjacent entrance

Excellent feature

- ♣ Satisfy client's requirement which car entrance is 90° adjacent or opposite
- ♣ Guide rails are placed on both sides of car diagonal, it makes car and counterweight running more smooth



90° 转角门
90° adjacent entrance

5



无井道电梯现场实拍
The true photo of the dumbwaiter without shaft



配件
The parts



配件
The parts



有井道电梯现场实拍
The true photo of the dumbwaiter with shaft

基本功能简介

楼层显示

电梯运行所到楼层由数码显示

开、关门状态指示

电梯运行到站后开启层门，数码显示开门状态提示此梯在本层使用

蜂鸣到站提示

具有到站蜂鸣提示功能

电锁功能

基站呼梯盒配备电锁，用于启动和关闭电梯的控制电路

呼梯应答

按下呼梯按钮，被呼楼层按钮数字指示灯亮，到站后撤消记忆指示灯灭

运行方向显示

运行方向由上下行发光箭头显示

超时运行保护

当电梯运行时间超出正常时间10s时，电机主回路被断开，电梯停止运行，以防烧坏电机

接触器粘连保护

当接触器失电后未能有效断开其触点时，电梯无法再次运行，以确保安全

故障自诊断

出现故障时，显示板将以特定符号显示电梯可能存在的故障

急停开关功能

在紧急情况下，断开控制电路使轿厢停止运行

错、断相保护

防止三相电源发生错、断相时，损坏电机

上、下限位及上、下极限保护

有效地防止电梯万一失控时的冲顶或撞底现象，使电梯更安全可靠

电机过流保护

电机电流过大时，断开主回路

检修运行

当进入检修状态时，轿厢以检修速度点动运行

急停回路检测

能够反映急停回路的通断情况



Basic function

" Floor display

Numeral display of landing floor

" Open or closed state display of the door

Open the door when the dumbwaiter is landing, light display should notice the door is opened

" Landing notice buzzer

Buzzer will ring when the cabin reaches the appointed floor

" Key switch

Main landing is equipped with key switch board to start or shut the control circuit

" Calling response

Press the call button, the number of the floor called will be lighted and keep shining until the car landing

" Running direction display

Running direction is displayed by shining arrow

" Overtime running protection

When the dumbwaiter running time exceeds the normal time 10s, the traction machine circuit will be cut off, the dumbwaiter is stopped to prevent the motor from damaging

" Contactor conglutination or locked protection

When the contactor can't activate or release normally, the dumbwaiter can't be started again to ensure safety

" Trouble self diagnosis

When the dumbwaiter has something wrong, the display board will display the possible trouble with special signal

" Emergency stop switch

It can cut off the control circuit to let the dumbwaiter stop when there are some emergencies

" Wrong or short phase protection

If the 3 phases power supply has wrong or short phase, it can prevent the motor from damaging

" Upper and lower location limit and final limit switch protection

To prevent the dumbwaiter is out of control or has some emergencies effectively

" Motor overcurrent protection

Cut off the main circuit when the current exceeds the normal state


" Inspection operation

When the dumbwaiter is at inspection state, you may inching operate it by upper or lower button

" Emergency stop circuit inspection

To reflect the emergency circuit state

土建图
Shaft drawing

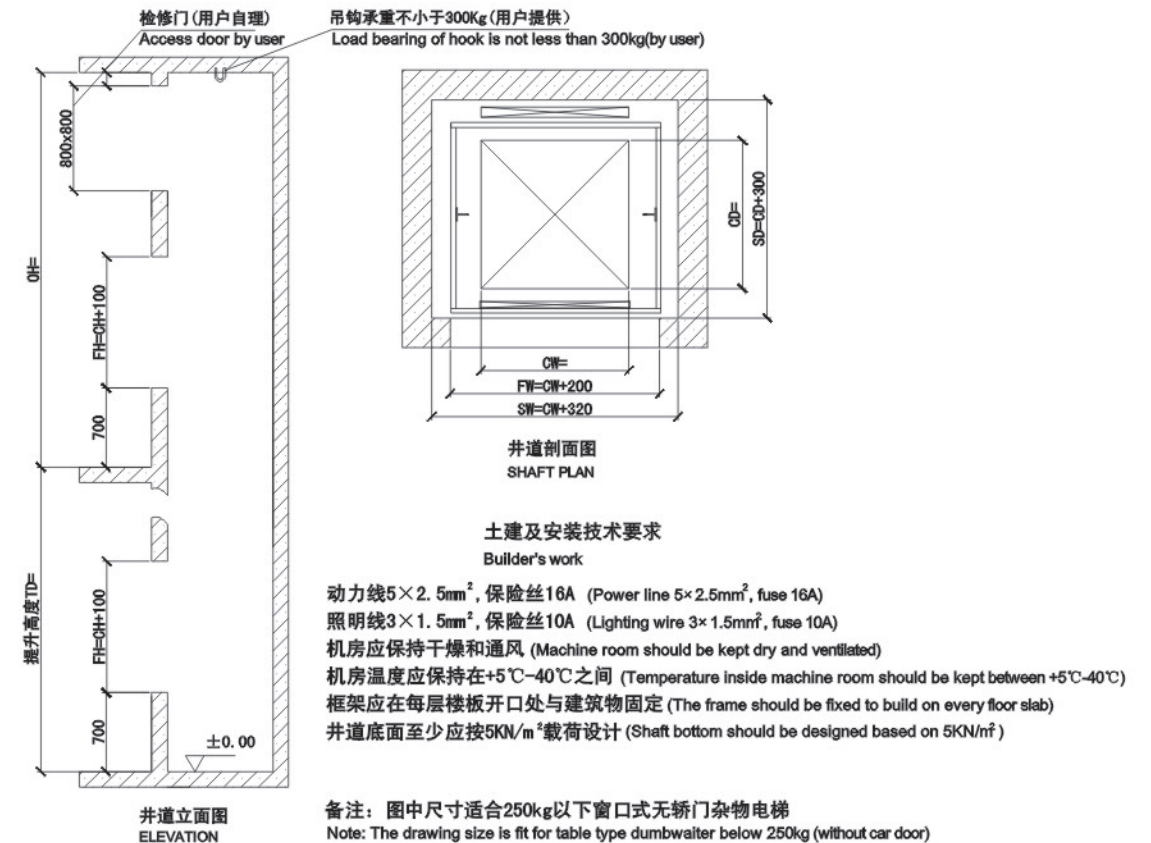

参数表 (Parameter list)

电梯形式 Type	窗口式 Table type	Prepared hole size for landing door (FW×FH); Shaft size (SW×SD); Overhead height (OH) Serving height (SH)											
额定载重	窗口 高度	轿厢尺寸 Car Dimension			垂直中分门（无轿门） Bi-Parting door(without car door)			单扇外敞门（无轿厢挡杆） Hinged door(without car protection bar)			双扇上滑门（无轿门） 2 panels up-sliding door(without car door)		
		宽 CW	深 CD	高 CH	门口尺寸	井道尺寸	顶层高度	门口尺寸	井道尺寸	顶层高度	门口尺寸	井道尺寸	顶层高度
					FW×FH	SW×SD	OH	FW×FH	SW×SD	OH	FW×FH	SW×SD	OH
Load	SH												
100kg	700	500	600	600	700×700	820×900	≥2800	750×700	820×870	≥2800	—	—	—
100kg	700	500	600	700	700×800	820×900	≥2900	750×800	820×870	≥2900	700×800	860×950	≥3000
100kg	700	600	600	800	800×900	920×900	≥3100	850×900	920×870	≥3000	800×900	960×950	≥3100
100kg	700	600	700	800	800×900	920×1000	≥3100	850×900	920×970	≥3000	800×900	960×1050	≥3100
200kg	700	700	700	800	900×900	1020×1000	≥3100	950×900	1020×970	≥3000	—	—	—
200kg	700	700	800	900	900×1000	1020×1100	≥3200	950×1000	1020×1070	≥3100	900×1000	1060×1150	≥3200

电梯形式 Type	落地式 Floor type	Prepared hole size for landing door (FW×FH); Shaft size (SW×SD); Overhead height (OH) Pit depth (DP)											
额定载重	底坑 深度	轿厢尺寸 Car Dimension			垂直中分门（无轿门） Bi-Parting door(without car door)			单扇外敞门（配轿厢挡杆） Hinged door(with car protection bar)			双扇上滑门（配轿门） 2 panels up-sliding door(with car door)		
		宽 CW	深 CD	高 CH	门口尺寸	井道尺寸	顶层高度	门口尺寸	井道尺寸	顶层高度	门口尺寸	井道尺寸	顶层高度
					FW×FH	SW×SD	OH	FW×FH	SW×SD	OH	FW×FH	SW×SD	OH
Load	DP												
200kg	500	800	800	1000	—	—	—	1050×1100	1120×1100	≥3000	1000×1100	1160×1200	≥3000
200kg	500	800	900	1000	—	—	—	1050×1100	1120×1200	≥3000	1000×1100	1160×1300	≥3000
200kg	500	900	900	1000	—	—	—	1150×1100	1220×1200	≥3000	—	—	—
250kg	500	900	1000	1000	—	—	—	1150×1100	1220×1300	≥3000	—	—	—
250kg	500	1000	1000	1100	—	—	—	1250×1200	1320×1300	≥3100	—	—	—
300kg	500	1000	1000	1200	—	—	—	1250×1300	1500×1200	≥3200	1200×1300	1500×1300	≥3200

备注: 300kg 杂物电梯无框架, 要求有土建井道无需机房
Note: 300kg dumbwaiters are required shaft without machine room, don't be equipped with self-supporting structure
宣传册中所标尺寸均以毫米mm为单位 (All sizes in the catalog are in millimeter)

宣传册中电梯图片均为我司样梯实拍, 产品颜色及材质等请以双方最后确认为准
All of the dumbwaiter photos in our catalog are all true photos of our sample from our company, the color and material and so on of product, please be subject to the final confirmation of both parties